

# INSTRUCTION

06-2019

**RZB**  
LIGHTING

Less is more 50

312323.003



IP 20 IK02







~ 220 - 240 V 50/60 Hz



3 x 1,5 mm<sup>2</sup>



1,50 mm<sup>2</sup>



T<sub>a</sub> min

312323.003

L 860, B 71, H 2

2,13 kg

-20 °C



CCT

CRI

T<sub>a</sub> max

LED

3 x 5,8 W

22 W

2300 lm

3000 K

80

30 °C



A++

A++


16 A / 100 µs

21

34



instruction  
Wartungsplan/  
maintenance  
schedule



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.  
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464




EN 12464 / EN 13201




RZB  
Rudolf Zimmermann,  
Bamberg GmbH  
Rheinstraße 16  
D-96052 Bamberg  
Deutschland  
Telefon +49 951/79 09-0  
Telefax +49 951/79 09-198  
www.rzb.de  
info@rzb-leuchten.de




1

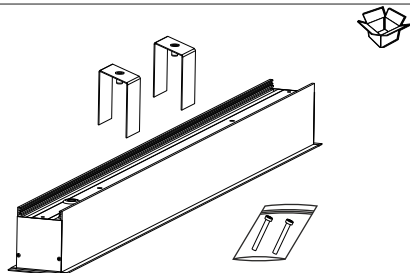


2

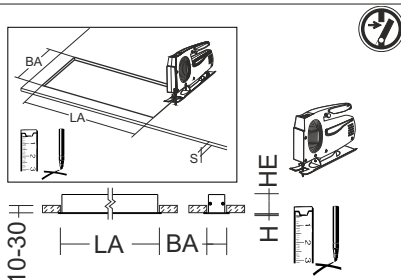


3

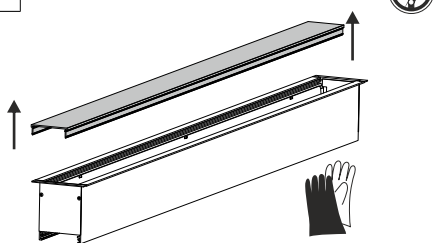


4

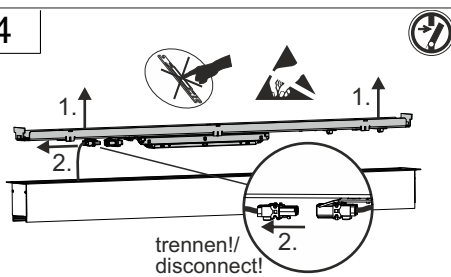


5





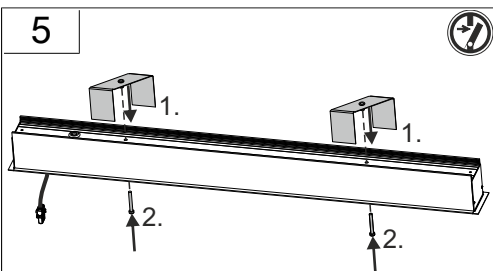




6a

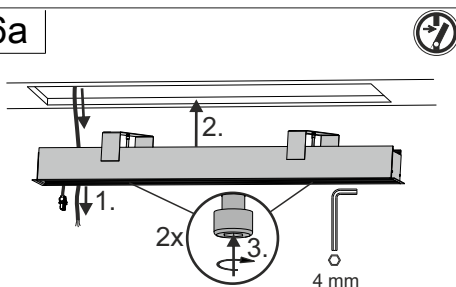

6b

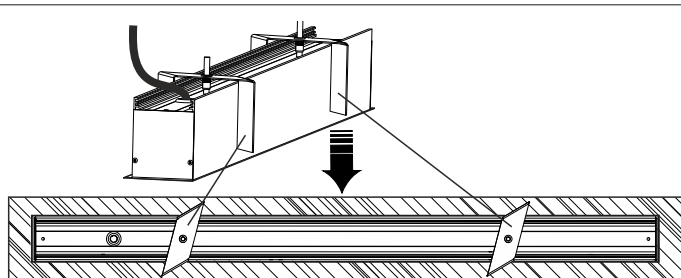

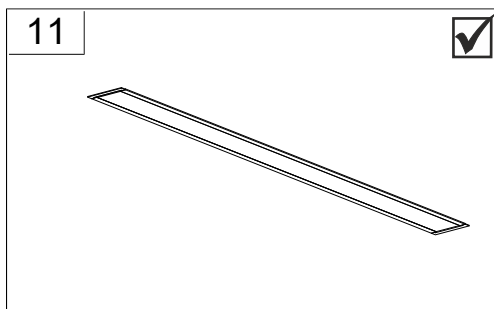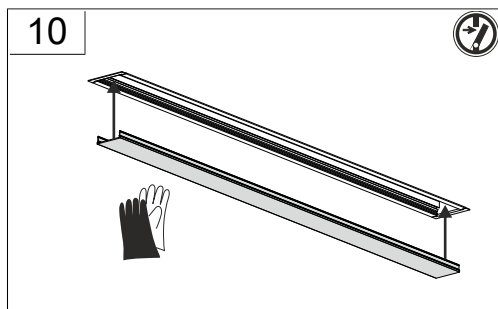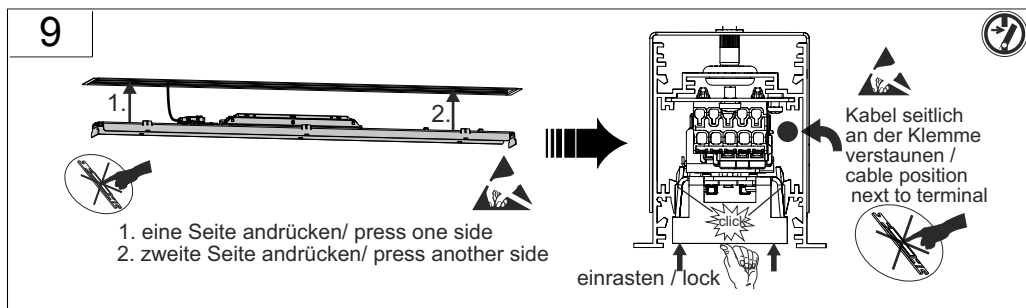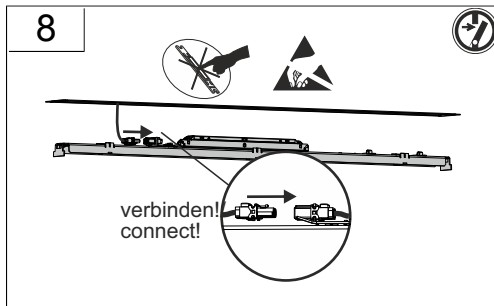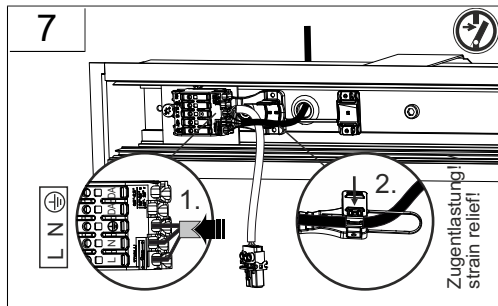

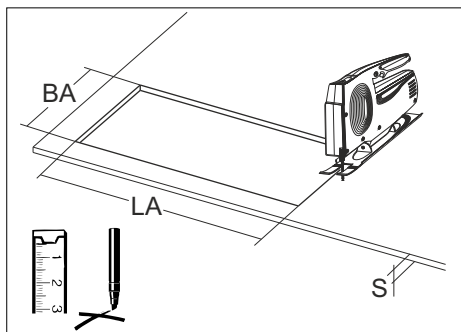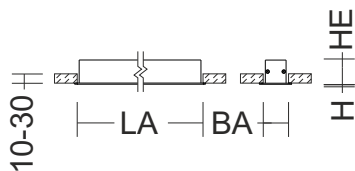

| Less is more 50 | L    | B  | H   | LA   | BA | S     | HE  |
|-----------------|------|----|-----|------|----|-------|-----|
|                 | 862  | 71 | 1,5 | 848  | 60 | 10-30 | 100 |
|                 | 1142 | 71 | 1,5 | 1128 | 60 | 10-30 | 100 |
|                 | 1421 | 71 | 1,5 | 1408 | 60 | 10-30 | 100 |
|                 | 1703 | 71 | 1,5 | 1688 | 60 | 10-30 | 100 |
|                 | 1983 | 71 | 1,5 | 1968 | 60 | 10-30 | 100 |

**DIN 4844**


Vor Installation, Wartung oder Reparatur freischalten/  
 power off before installation, maintenance or repair