

INSTRUCTION



04-2017

RZB
LIGHTING


Mega Tower

612146.004

IP 65 IK05
 176 - 264 V 0/50/60 Hz
 LED
 3 x 2,5 mm²
 2,50 mm²

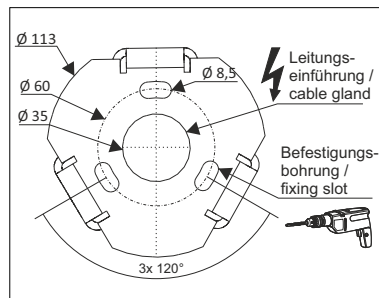

	 [mm]					
612146.004	D 115, H 750	LED	10 W	10 W	4,52 kg	
Φ 	EEK _{LED}	EEK 	CRI	CCT	T _a min	T _a max
600 lm	A+	A+	85	3000K	-20 °C	35 °C
 B10	 B16	 C10	 C16	 I _{max}  I _{max/2} T50		
17	28	28	45	27 A		



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.









EN 12464



EN 12464




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

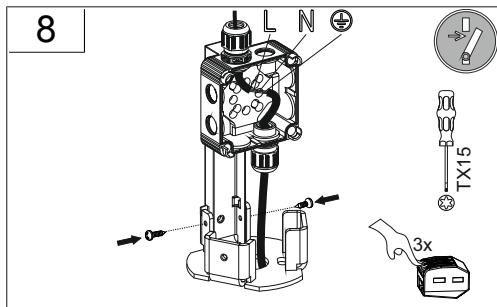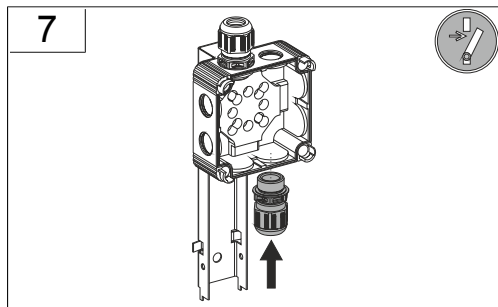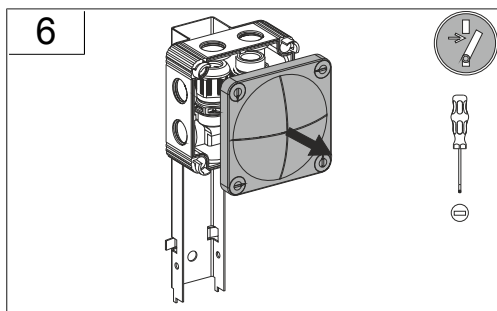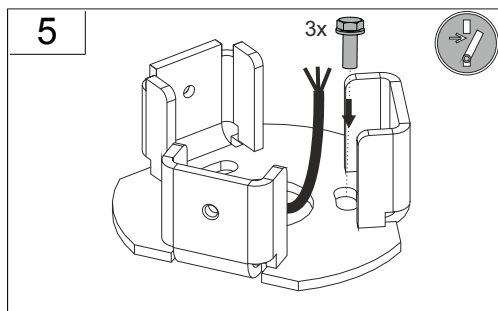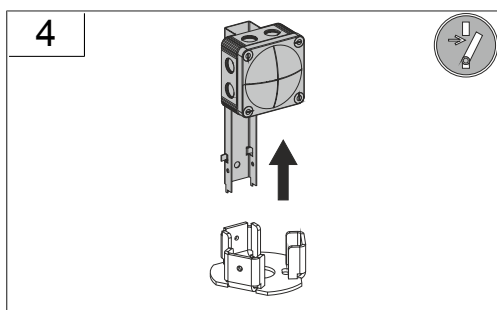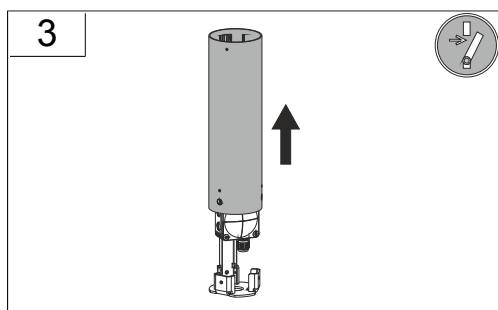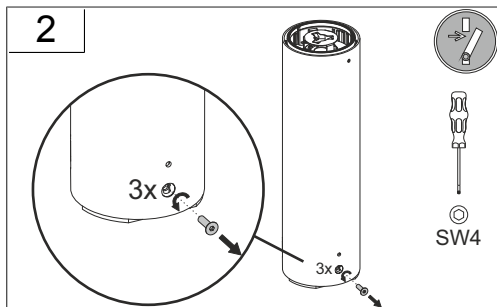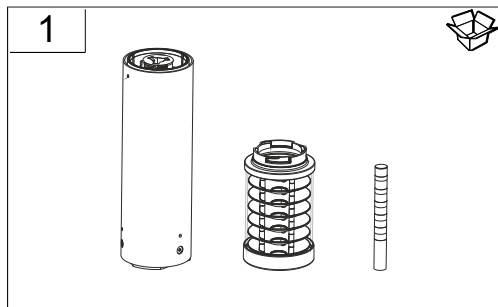





9




10




11

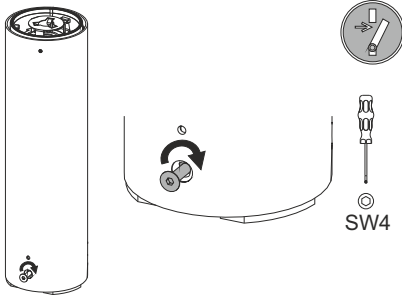


12




13



14

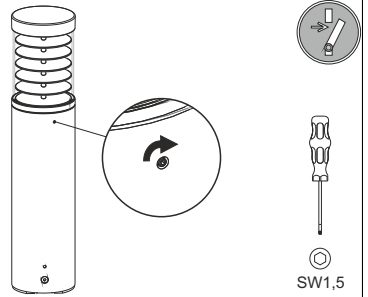

15





a

DIN 4844




Vor Installation, Wartung oder Reparatur freischalten/
power off before installation, maintenance or repair

b



Temperatur / temperature
=> -20 °C - +35 °C

Indoor & Outdoor

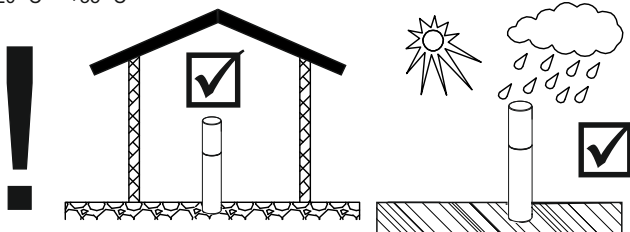



982103.000

D 115, H 401,

1,15 kg



982260.004

D 115, H 190

0,91 kg

Instruction:



04-2017



Instruction:



04-2017



