


Radio system controller for 1-5 channel operation (RGB+TW)

Article no. 18190000

Light.

For Generations.

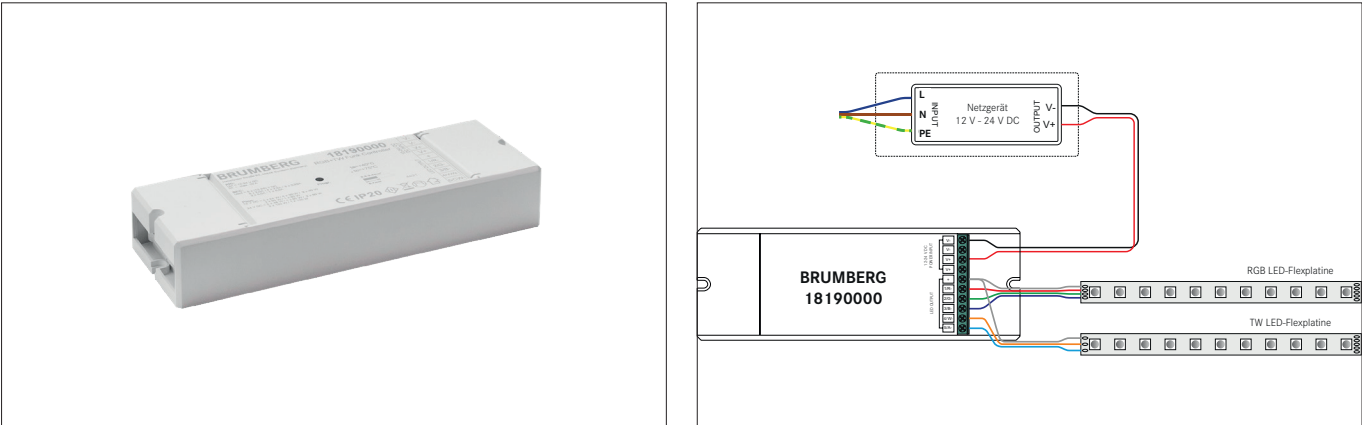

Tender

Radio system controller for 1-5 channel operation (RGB+TW).Universal radio system controller for controlling 1-5-channel LED modules. Possible control variants: RGB + TunableWhite. Compatible with: Remote control RGB + TW: 18205000. For further functions of the above-mentioned components, please refer to the respective product description. Radio master controller 18190000: voltage: 12-24 V DC, current: max. 5 x 2.0 A, 4 x 2.5 A, 3 x 3.33 A, 2 x 5.0 A, 1 x 5.0 A. Power: max. 120 W / 240 W (12 V DC / 24 V DC). Control: negative (common anode). Control signal: PWM,. Radio frequency: 869.5 MHz. Range (line of sight): up to 20. Dimensions: L 170 x W 59 x H 29 mm. Material: plastic, delivery: including strain relief. Controller per remote control: max. 4 (with optimal radio connection) Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Power: 240 W, Control: Wireless technology control.

Article data	
Article no.	18190000
GTIN	4251433951216
Short description	Radio system controller for 1-5 channel operation (RGB+TW)
Length	170 mm
Width	59 mm
Hight	29 mm
Weight	0.100 kg

Radio system controller for 1-5 channel operation (RGB+TW)
Article no. 18190000

Light.
For Generations.

Packing data	
Gross weight	0.12 kg
Length of packaging	50 mm
Packaging width	25 mm
Packaging hight	180 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.