


LED power supply 24 V DC, dimmable
Article no. 17232000

Light.
For Generations.

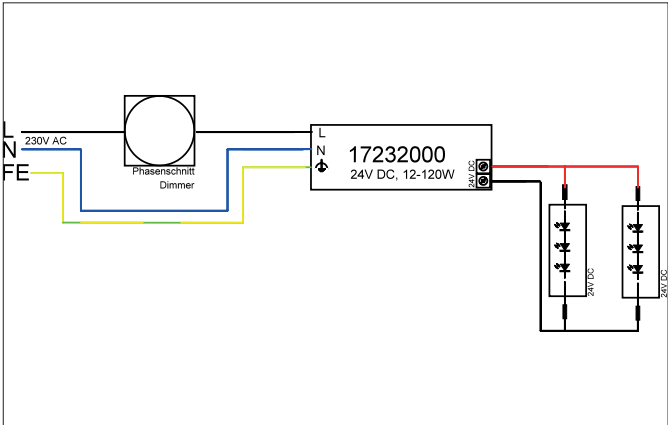

Tender	
LED power supply 24 V DC, dimmable, , Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 24 V DC, Power: 120 W, Dimmable: Yes, Control: Trailing-edge phase.	

Article data	
Article no.	17232000
GTIN	4251433938460
Short description	LED power supply 24 V DC, dimmable
Material	Plastic
Shape	Rectangular
Length	223 mm
Width	64 mm
Hight	32 mm
Weight	0.638 kg
stamp	ENEC, MM
Conformance	CE

LED power supply 24 V DC, dimmable

Article no. 17232000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	II
Degree of protection	IP20
Power min	12 W
Power max.	120 W
Output_ripple_current	500
Starting current	55 A (190 µs)
Suitable for emergency lighting	No
measure point (tc)	85 °C
Power factor	0.95
max. no. lights on B10 A	8
max. no. lights on B16 A	13
Output voltage max	24.00 V
Output voltage min	24.00 V
Control	Trailing-edge phase
Connection type-primary	Screw-in connection
Connection type-secondary	Screwed terminal
Number of poles	3
Environment temperature (ta)	-10 °C bis +45 °C
Average nominal lifespan	30000 h
Output current	5 A mA

Packing data	
Gross weight	0.671 kg
Length of packaging	230 mm
Packaging width	40 mm
Packaging height	70 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.