


LED recessed wallwasher CORE
Artikel-Nr. 88687173

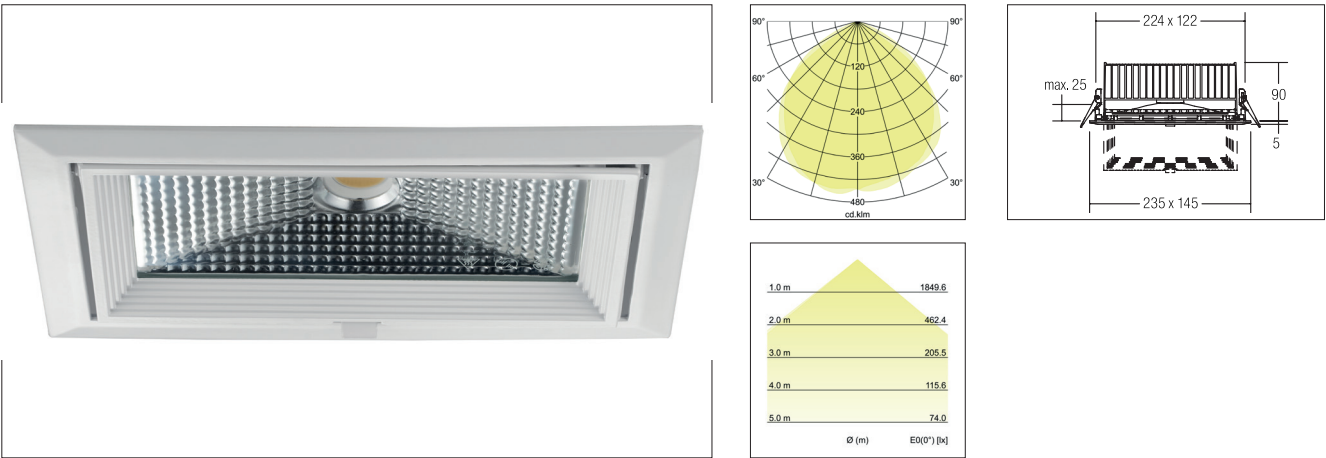

LED recessed wallwasher CORE, white, square. In a compact design, for installation in tool-less rapid assembly systems. Including a light source: 1 x LED COB, power of LED: 40 W, system power: 43.2 W, heat dissipation: passive (without a fan), material: aluminum / glass, rotation angle: can swiveled, dimensions of lamp: L 235 mm x W 145 mm x H 90 mm, weight: 1.1 kg, mechanical installation depth of 50 mm - 90 mm depending on the swiveling angle (45° - 0°). Including an driver, on/off switchable (dimensions: L 108 x W 68 x H 32 mm), power factor > 0.9 (230 V AC 50 Hz). Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 45W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 3.700lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 110°, Adjustability: Pivoted, With control gear: Yes, Control: on/off.

Artikel-Nr.	88687173
Stand:	26.10.2021 05:04

Beam angle	110 °
Colour temperature	3000 K
Colour	weiß
Luminous flux	3,700 lm
System efficiency	85 lm/W
Beam angle	110 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Glass / Plastic
Power	45 W
Lamp	LED
Colour rendering	CRI > 80
Control	on/off

Built-in width	224 mm
Built-in length	122 mm
Installation depth	90 mm
Voltage	230V AC 50Hz
Degree of protection	IP20
Protection class	II
Adjustability	Pivoted
Length	235 mm
Width	145 mm
Swivel angle	45 °
Circuit type	Parallel conduction